





**FBC2FF 2 kg Carbon Dioxide c/w Frost Free Horn**  
**FBC5 5 kg Carbon Dioxide**

**Fire Rating 34B**  
**Fire Rating 55B**

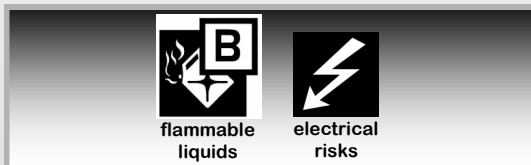

-  BSI accredited to BS EN3 & Kitemarked
-  Manufacturer's 5 year warranty
-  Stored pressure - Easy low cost maintenance
-  Does not leave any residue
-  Aluminium lightweight body
-  Suitable for B class and electrical fires
-  Controlled discharge
-  Supplied with wall-mounting bracket
-  Safe to hold Swivel horn when operating (FBC2FF)

Ideal for use on precious electrical equipment and used in contamination-sensitive places such as computer rooms, labs, food storage areas and processing plants. Also suitable in offices, factories or warehouses usually alongside a foam or water unit.

The 2kg model FBC2FF is fitted with a Safe Swivel Horn which protects the user's hands against frost burn. Also improves the efficiency of the fire extinguisher.

The 5kg model has a hose with the horn attached complete with its handle.

Refilling/Service: Should be carried out annually to BS 5306 Part 3, 2009. After complete or partial use the extinguisher should be refilled to BS 6643 Part 1, 1985. Both refilling and servicing to be carried out by a competent person.

Spares available on request.

Model	FBC2FF	FBC5
Capacity	2 kg	5 kg
Total Weight	5 kg	12.2 kg
Total Height	485 mm	675 mm
Total Width (excluding hose/horn)	180 mm	220 mm
Working Temp.	-30° to +60°C	-30° to +60°C
Discharge Time	9 secs	17 secs
Discharge Range	2-3 m	2-3 m
Operating Pressure	56 bar @ 20°C	56 bar @ 20°C
Minimum Burst Pressure	215 bar	215 bar
Packing Specification		
Qty Per Carton	1	1
Carton Dimensions	50x18x18.5 cm	75x23x17 cm
Carton Volume	0.017 m <sup>3</sup>	0.027 m <sup>3</sup>
Carton Weight	5.5 kg	12.7 kg
Qty Extinguishers per Pallet	80	48
Pallet Dimensions	120x100x165 cm	120x100x148 cm
Pallet Volume	1.980 m <sup>3</sup>	1.776 m <sup>3</sup>
Pallet Gross Weight	440 kg	632 kg

