


FBP4	4 kg	ABC Dry Powder	Fire Rating	21A / 144B
FBP6	6 kg	ABC Dry Powder	Fire Rating	27A / 144B
FBP9	9 kg	ABC Dry Powder	Fire Rating	34A / 233B

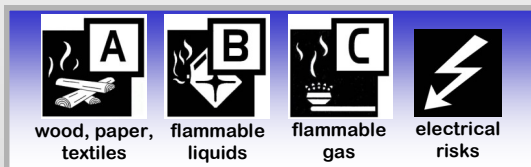

-  BSI accredited to BS EN3 & Kitemarked
-  Manufacturer's 5 year warranty
-  Stored pressure - Easy low cost maintenance
-  Safe for use on electrical equipment
-  Suitable for A,B & C class fires
-  Controlled discharge
-  Brass valve - Easy to read pressure gauge
-  Protective plastic base
-  Supplied with wall-mounting bracket

FBP6-M and FBP9-M are particularly suitable for use on vehicles having to meet the requirements of the Carriage of Dangerous Goods by Road (ADR) regulations.

Ideal for use in offices, agricultural machinery, farms, for a wide range of industrial and commercial applications, oil pump houses, filling stations, chemical paint houses and combustible places.

Refilling/Service: Should be carried out annually to BS 5306 Part 3, 2009. After complete or partial use the extinguisher should be refilled to BS 6643 Part 1, 1985. Both refilling and servicing to be carried out by a competent person. Spares available on request.

Model	FBP4	FBP6	FBP9
Capacity	4 kg	6 kg	9 kg
Total Weight	6.75 kg	10.1 kg	14.3 kg
Total Height	485 mm	525 mm	600 mm
Total Width (excluding hose)	210 mm	220 mm	230 mm
Working Temp.	-30° to +60°C	-30° to +60°C	-30° to +60°C
Discharge Time	14 secs	18 secs	24 secs
Discharge Range	6 m	6 m	7 m
Operating Pressure	14 bar @ 20°C	14 bar @ 20°C	14 bar @ 20°C
Minimum Burst Pressure	55 bar	55 bar	55 bar
Packing Specification			
Qty Per Carton	1	1	1
Carton Dimensions	50x18x15 cm	53x18x17 cm	60x20x20 cm
Carton Volume	0.014 m <sup>3</sup>	0.016 m <sup>3</sup>	0.024 m <sup>3</sup>
Carton Weight	7.1 kg	10.5 kg	14.7 kg
Qty Extinguishers per Pallet	80	70	48
Pallet Dimensions	120x100x133 cm	120x100x134 cm	120x100x130 cm
Pallet Volume	1.596 m <sup>3</sup>	1.608 m <sup>3</sup>	1.560 m <sup>3</sup>
Pallet Gross Weight	590 kg	757 kg	728 kg

